



STRAIGHT GRANITE CURB

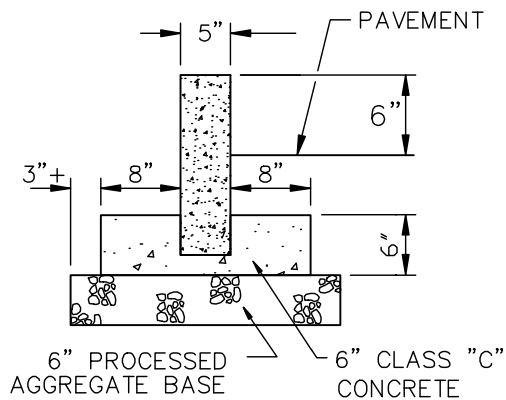

RADIUS GRANITE CURB
(AND GRANITE TRANSITION CURB AT DRIVEWAYS)

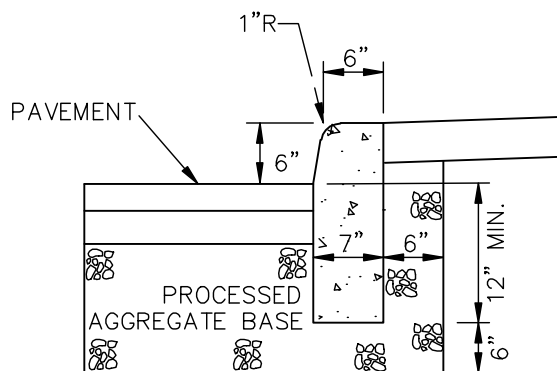

CONCRETE CURB

NOTES:

1. MINIMUM LENGTH OF STRAIGHT GRANITE CURB IS 4'-0".
2. GRANITE CURB SHALL BE FINISH-SAWN TOP AND SPLIT FACE JOINTED.
3. GRANITE CURB WITH A RADIUS OF 100' OR LESS SHALL BE BUILT OF RADIUS GRANITE CURB AND SET IN 6" OF CONCRETE.
4. THE JOINTS OF THE GRANITE CURBING SHALL BE POINTED WITH MORTAR FOR THE FULL DEPTH OF THE CURBING.
5. CONCRETE CURBING SHALL BE CONSTRUCTED IN SECTIONS HAVING A UNIFORM LENGTH OF APPROXIMATELY 10 FEET UNLESS OTHERWISE DIRECTED. SECTIONS SHALL BE SEPARATED BY ASPHALTIC EXPANSION JOINT MATERIAL.

NOT TO SCALE

TOWN OF SOUTH WINDSOR
STANDARD DETAIL

MARCH, 2005

MISCELLANEOUS
CURBING

REVISED:

APPROVED

PUBLIC WORKS DIRECTOR